

PARKSIDE

Cladding

Product Catalogue v1.0



SPECIFICATION

SPECIES

PARKSIDE CLADDING species available are:

SPOTTED GUM

Spotted Gum is a beautiful Queensland specie timber, botanically named *Corymbia Citriodora*, and is a unique blend of brown and grey colours.

FOREST REDS

Forest Reds is a blend of red coloured Queensland Eucalypts, predominately, Forest Red Gum; Red Ironbark and Grey Gum.

IRON BARK

Ironbark is Queensland Grey and Red Ironbark.

MIXED BLEND

Mixed Hardwood is a mixed blend of Queensland based lighter coloured species.

Other species may be available on request.

1. Copies of this Data sheet are available from PARKSIDE TIMBER Corporate Office.

TOLERANCES


At the time of milling, the tolerance on any dimension shall be + or - 0.5mm, provided that any mismatch does not exceed 1.0mm

FINISH


Refer to Appendix A: Parkside Naturawood Flooring Permissible Limits.

PROFILES


75x19 Shiplap

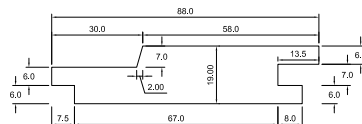

125x19 Shiplap

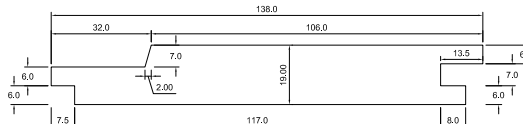

122x19 Chamfer

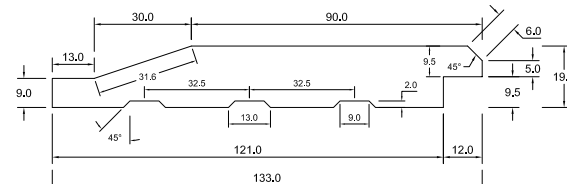

SCOPE

Production and packaging of PARKSIDE CLADDING.

APPLICATION

Product supplied to this specification will comply with A.S 2796 as well as meeting the additional requirements of this specification, except where any conflict occurs between this specification and any referenced document, this specification shall take precedence.

The most relevant (but not all) sections of A.S 2796 are reproduced in appendices to this specification.



LENGTHS

For all sizes:

- Minimum length - 1.5m
- Maximum length - 5.9m

All packs come as random lengths within the above ranges

GRADES

Visually graded to A.S. 2796 to the grades in the table below.

SPECIE	FEATURE	STANDARD	SELECT
Mixed Species	Yes	Yes	Yes
Spotted Gum	Yes	Yes	Yes
Grey Ironbark	-	Yes	Yes
Forest Reds	-	Yes	Yes

MOISTURE CONTENT

At the time of delivery, the moisture content anywhere within any piece shall not be less than 10% nor more than 18% as per A.S. 2796. Shiplap 9 - 14% and Chamfer 10 -18%.

BOW and SPRING

Limits to bow and spring (in mm) are set out on page 9 of this catalogue.

TREATMENT

All sapwood is ACQ treated to H3.

PACKAGE DETAILS

Each hardwood cladding pack supplied by PARKSIDE TIMBER has a number of package guidelines, to help ensure consistent quality and presentation of the product.

There are typically plastic straps on a pack, which are assisted by a wooden glut at the base of the pack (70/90 x 45mm) and at the top of a pack a wooden packer, assisting in prevention of marking on the finished product. Each pack comes fully wrapped in plastic, to help protect from potential irritants.


PLEASE NOTE - plastic wrap is not suitable as a comprehensive protective barrier from the elements. The plastic wrap is designed to give limited protection during transport and handling only.

PACK SIZES

Pack size by Lineal Metre approx.

END SECTION	ROW QUANTITY	HEIGHT QUANTITY	PACK SIZE
75 x 19 Shiplap	6	15	460
125 x 19 Shiplap	4	15	320
122 x 19 Chamfer	4	15	320

PACK TAG



PRODUCT DATA

ACTUAL SIZE	NOMINAL SIZE	DENSITY (Kg/m ³)	WEIGHT per PACK (Kg)
75 x 19 Shiplap	100 x 25	608	940
125 x 19 Shiplap	150 x 25	657	962
122 x 19 Chamfer	150 x 25	657	962